

**IN THE UNITED STATES PATENT OFFICE**

#2  
JC857 U.S. PTO  
09/912089  
07/24/01

Applicant: Binding et al.  
Serial No.: unassigned  
Filed: herewith

Date: July 24, 2001  
Docket No.: CH919990053  
Group Art Unit: unassigned  
Examiner: unassigned

For: Method of Externalizing Relational and ASN.1-Formatted Data into XML Format

**SUBMISSION OF CERTIFIED PRIORITY DOCUMENT**

To the Assistant Commissioner of Patents:

Enclosed herewith is a certified copy of the above-identified Application No. 00810665.0, filed in Europe on July 26, 2000, for which applicant claims priority under 35 U.S.C. & 119.

It is requested that this be made part of record in the subject application.

Respectfully submitted,

By: Lauren Bruzzone  
Lauren Bruzzone  
(Reg No 35,082)  
Telephone: (914)945-3255

IBM CORPORATION  
Intellectual Property Law Dept.  
T.J. Watson Research Center  
P.O. Box 218  
Yorktown Heights, N.Y. 10598

ExpressMail: EL761869956US  
Date of Deposit: July 24, 2001

**THIS PAGE BLANK (USPTO)**

CH9-1999-0053



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

JC857 U.S. PTO  
09/912089



Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

00810665.0

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**I.L.C. HATTEN-HECKMAN**

DEN HAAG, DEN  
THE HAGUE,  
LA HAYE, LE

24/04/01

**THIS PAGE BLANK (USPTO)**



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.:  
Demande n°: 00810665.0

Anmeldetag:  
Date of filing:  
Date de dépôt: 26/07/00

Anmelder:  
Applicant(s):  
Demandeur(s):  
International Business Machines Corporation  
Armonk, NY 10504  
UNITED STATES OF AMERICA

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:

Method of externalizing relational and asn.1-formatted data into XML format

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:  
/

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:

**THIS PAGE BLANK (USPTO)**

## METHOD OF EXTERNALIZING RELATIONAL AND ASN.1-FORMATTED DATA INTO XML FORMAT

### Background of the Invention

5

This invention relates to the field of conversion of data from one format to another with a digital data processing device or devices. More particularly, the invention relates to a process of transforming legacy data in a legacy database into a Extensible Markup Language ("XML") format which is more useful for current applications.

10

A forerunner of XML, HTML ("Hypertext Markup Language") was conceived as an easily understandable language for the exchange of scientific and other technical documents. HTML addressed the problem of SGML ("Standard Generalized Markup Language") complexity by specifying a small set of structural and semantic tags suitable for authoring relatively simple documents. In addition to simplifying the document structure, HTML added support for

15

hypertext. Multimedia capabilities were added later.

In a brief period of time, HTML became very popular and quickly outgrew its original purpose. Since HTML's inception, many new elements have been devised for use within HTML (as a

20

standard) and for adapting HTML to vertical, highly specialized, markets.

A severe shortcoming of HTML is its lack of data structuring mechanisms. HTML documents capture presentation and rendering aspects of marked-up documents, but the formalism does not lend itself to describe the structure of data which is exchanged between computing entities in

25

typical client-server applications.

XML is a proposed standard for describing the structure of semi-structured data. The formalism supports the description of concrete mark-up languages which allow the specification of hierarchical (i.e. tree-like) data structures. Concrete mark-up languages can be specially adapted

30

to particular application domains, such as the airline industry, finance industry, etc. where said

concrete mark-up languages allow to model data entities per-use by these applications. XML can also be used to specify HTML as a concrete mark-up language. More information about XML can be found in "Extensible Markup Language (XML) 1.0: W3C Recommendation 10 February 1998", <http://www.w3.org/TR/REC-xml>. and E.H. Harold, XML Extensible Markup Language,  
5 (IDG Books 1998).

XML, proposed by W3C (the World-Wide Web standardization body), has found wide-spread acceptance in the industry and is rapidly becoming the *lingua franca* for data representation/description mechanisms used throughout the World Wide Web. It is an open  
10 specification and several major industry leaders, among them Microsoft and IBM, are pushing for the use of XML formatted data exchanged between the various IT systems and sub-systems which make up an enterprise as well as a personal computing environment.

Abstract Syntax Notation ("ASN", currently version One, "ASN.1") serves a similar purpose:  
15 data structures can be described abstractly using the ASN.1 syntax. Its initial intention was to provide a scheme to specify the structure of data to be exchanged between computer systems in a system-independent, common representation. Therefore, ASN.1 also provides several concrete standardized transfer encodings such as "Basic Encoding Rules" (BER), "Definite Encoding Rules" (DER) etc.. Due to the complexity of the ASN.1 data description language as well as the  
20 multiplicity of encoding rules, ASN.1 usage has been restricted to a limited set of IT applications, mainly related to IT security (e.g., directories, public key infrastructure).

Most data on the Internet is stored in legacy databases, many of which are using a relational data base model and in some cases ASN.1 encoding. For both cases, it is of commercial value to  
25 externalize such data into an XML compliant format in order to enable new Internet based applications.

For relational databases as well as for ASN.1 data, some work has been done to map actual data into XML compliant data formats. However, these transformations do not generate the meta-data  
30 description, embodied by an XML Document Type Definition (DTD). For example, one



proposed translation for ASN.1 encoded data, published at <http://asf.gils.net/xer/standard.html>, only defines a mapping from one concrete ASN.1 data module onto one concrete XML data representation without generating the XML DTD.

- 5 What is needed, therefore, is an efficient method to externalize legacy data into an XML compliant format where the format is specified by an automatically generated XML meta-description (i.e. DTD). Such procedures will enable the access and processing of legacy data by new, Internet generation applications.

10

### Summary of the Invention

A computer-readable medium is encoded with a method of externalizing legacy data from a legacy database on a data resource into an Extensible Markup Language ("XML") -compliant format where the format is specified by an automatically generated XML meta-description, thus  
15 enabling access and processing of legacy data by XML-compliant applications. The method includes an exploration/adaptation step for exploration of the data resource, and a production step for generation of the XML data out of the legacy data. The method automates the data format mapping between legacy databases and an XML compliant representation of that data.

- 20 As another feature of the invention, the method allows conversion between ASN.1 specification and an XML meta data description or Document Type Description ("DTD") and the transformation of ASN.1 encoded data into XML compliant format adhering to said XML DTD.

In an advantage of the invention, accessing the relational data base model through an XML  
25 compliant data format allows companies such as banks, insurance companies, transportation enterprises, and department stores to open their databases to customers.

Any relational database can be accessed and its contents converted into a XML representation that is much more accessible to Internet applications, thus facilitating e-commerce.

30

### Brief Description of the Drawings

Fig. 1 is a flow diagram of the method of converting legacy data into an XML compliant data format.

5

Fig. 2 is a flow diagram of a submethod that converts ASN.1 data into XML compliant data.

### Detailed Description of the Preferred Embodiment

10

Referring now to FIG. 1, the method 10 of the present invention is a method for externalizing legacy data from a legacy database on a data resource into an Extensible Markup Language ("XML") -compliant format where the format is specified by an automatically generated XML meta-description. This reformatting enables access and processing of legacy data by XML-compliant applications.

15

The method 10 automates the data format mapping between relational databases or ANS.X formatted databases and an XML compliant representation of that data, by performing the following steps: (1) an exploration/adaptation step 12 for exploration of the data resource, and (2) a mapping step 14 for generation of the XML data out of the legacy data.

20

The submethod 14a or 14b to be applied in the second mapping step 14 is determined by the data format of the legacy data. If the data is in relational data format, the submethod 14a is applied, and includes three substeps. In a first substep 16, relations (i.e. tables) within the relational data model are mapped onto XML elements. In a second substep 20, tuples (i.e., rows) within a relation are mapped onto XML elements which are nested within the XML "table" element; and in a third substep 22, attributes (i.e., columns) of tuples are mapped onto XML elements which are nested within the XML "row" element.

25

As a concrete example, consider relation T with attributes (a1, a2, ..., an). This can be

30

represented using the following XML data description:

```
<!ELEMENT TABLE_T(ROW_T)*>
<!ELEMENT ROW_T (a1, a2, .... An)>
5  <!ELEMENT a1 ....>
    <!ELEMENT a2 ....>
    <!ELEMENT a3 ....>
    ....
    <!ELEMENT an ....>
```

10

In the exploration step 12, standardized database functions may be used to retrieve information on a database's data scheme. For example, the industry standard Open Database Connectivity ("ODBC") supports functions SQL Columns( ) allowing retrieval on the names and types of a table's attributes (columns).

15

Thus, it is possible to extract sufficient information from a database that allows the automatic generation of an XML DTD as outlined above and which is independent of the actual data stored in the database.

20 Referring now to FIGs. 1 and 2, when the exploration step 12 identifies ASN.1 formatted data, and the associated ASN.1 meta data specification, a conversion mapping submethod 14b is activated, which generates an XML meta data description (DTD) from ASN.1 meta data.

The mapping submethod 14b covers all ASN.1 constructs, both primitive and composite.

25 Primitive constructs are, for example, Boolean, integer, bit string, etc. Composite constructs are combinations of primitive constructs, such as SET and SEQUENCE. Specifications for Abstract Syntax Notation One can be found in the CCITT Recommendation X.208 (1988). More detailed information about XML can be found in the article "W3C: Extensible Markup Language ("XML") 1.0, February 1998, at <http://www.w3.org/TR/REC-xml>. References to such

30 specifications are, of course, routine when dealing with computer programs or standardized constructs.

Referring now to Fig. 2, the mapping submethod 14b performs the following steps.

In a first step 30, primitive ASN.1 types are mapped onto XML entities containing character data ("CDATA"). For each primitive ASN.1 type, we define one entity, for example <!ENTITY %

5 BOOLEAN "(true|false)">, <!ENTITY % INTEGER "CDATA"> and so on.

In a second step 32, fields of ASN.1 constructs, which are of a primitive ASN.1 type, become XML elements with an attribute of the corresponding entity. For example, if the method 10

10 element as follows:

```
<!ELEMENT a>,  
<!ATTLIST a  
    value INTEGER #REQUIRED
```

15 >

In a third step 34, the ASN.1 "ANY" type is mapped onto an XML entity containing un-interpreted data ("PCDATA").

In a fourth step 36, the ASN.1 constants are mapped onto XML entities.

20

In a fifth step 40, the ASN.1 "SEQUENCE" construct is mapped onto an XML element containing the individual elements of the SEQUENCE as an XML sequence. Optional ASN.1 elements are handled with the XML "?" operator.

25 In a sixth step 42, the ASN.1 "SEQUENCE OF" construct is mapped onto the XML repetition construct of base elements "\*". The ASN.1 required ordering of SEQUENCE OF is implicit through the ordering with the repetition indicated via XML's "\*" operator.

In a seventh step 44, the ASN.1 "SET" construct is mapped onto the XML choice construct.

30 Optional ASN.1 elements in a SET are handled through the "?" operator.

In an eighth step 46, the ASN.1 "SET OF" construct is mapped onto the XML repetition construct of "\*\*".

- 5 In a ninth step 50, the ASN.1 "CHOICE" construct is mapped onto an XML element containing the individual elements of the CHOICE as XML alternatives by using the "I" operator.

In a tenth step 52, the ASN.1 "COMPONENTS OF" construct is mapped as follows:

- 10 For every COMPONENTS OF construct, an XML element is created which contains the individual component elements.

The XML construct for the ASN.1 "COMPONENTS OF [ASN.1 Construct]" expression optionally has an attribute that refers to the contained construct. Thus, an ASN.1 construct such

- 15 as

B:= SEQUENCE { a INTEGER, b OCTET STRING};

A:= SEQUENCE { COMPONENTS OF B, c UNIVERSAL TIME}

Becomes the XML DTD specification

- 20 <!ELEMENT ComponentsOf\_B (a, b)>

<!ATTLIST ComponentsOf\_B

origin CDATA #REQUIRED

>

<!ELEMENT A (ComponentsOf\_B, c)>

- 25

This backward reference to the component container is necessary to avoid loss of information contained in the ASN.1 meta-data description.

- 30 In an eleventh step 54, each ASN.1 module is mapped onto a specific XML DTD by recursively applying the above rules to the module's contents. Each DTD forms a separate name space. The

- 8 -

ASN.1 constructs IMPORT and EXPORT can then be modeled using qualified names for imported/exported XML elements.

In order to perform a lossless mapping (in that no information is lost in the mapping) onto XML, the submethod 14b can insert ASN.1 tags into the XML specification by including either TAG elements or three TAG attributes in the XML specification. XML "TAG" elements use an attribute to indicate their policy, i.e., implicit or explicit, their nature, i.e., universal, application-wide, context-specific, or private-use and the tag's value. XML tag attributes in a separate name-space asn are ASN:policy (EXPLICIT or IMPLICIT), ASN:class (UNIVERSAL, APPLICATION, CONTEXT, PRIVATE), and ASN:tag containing the original ASN.1 tag value. Note that the preservation of tagging information is only necessary for a lossless mapping and can therefore be considered optional.

An important assumption that has been made until now is that names are unique. This can be achieved by flattening the nested name structure of any ASN.1 construct through concatenating the ASN.1 names. For example, B:=SEQUENCE {a INTEGER, b OCTET STRING} would generate XML element names B, B\_a, and B\_b.

The above handling of COMPONENTS OF guarantees lossless mapping. However, ASN.1 encoders ignore that information and thus it is conceivable to also omit this information when defining the XML mapping. The above example would simply become

<!ELEMENT A (B\_a, B\_b, c)>

Multiple variations and modifications are possible in the embodiments of the invention described here. Although certain illustrative embodiments of the invention have been shown and described here, a wide range of modifications, changes, and substitutions is contemplated in the foregoing disclosure. In some instances, some features of the present invention may be employed without a corresponding use of the other features. Accordingly, it is appropriate that the foregoing description be construed broadly and understood as being given by way of illustration and example only, the spirit and scope of the invention being limited only by the appended claims.

## Claims

1. A method of externalizing legacy data from a legacy database on a data resource into a format compliant with a certain structured output format in which the format is specified by an associated, automatically generated meta-description, thus enabling access and processing of legacy data by applications that read the structured output format.
2. The method of claim 1, wherein further are added an exploration/adaptation step for exploration of the data resource and a production step for generation of the structured output format data out of the legacy data on the data resource.
3. A method of transforming legacy data from a legacy database on a data resource into Extensible Markup Language ("XML") format, the method comprising the steps of:  
taking data modelled in a manner selected from a group consisting of relational data and data formatted according to an Abstract Syntax Notation ("ASN.1") data model and transforming such data into an XML-compliant data format, wherein an Extensible Markup Language meta-data description, contained in an XML Document Type Definition ("DTD"), is automatically generated.
4. The method of claim 3, wherein further are added an exploration/adaptation step for exploration of the data resource and a production step for generation of the Extensible Markup Language data out of the legacy data on the data resource.
5. A method of mapping data formatted according to either of a group consisting of a relational database model and an Abstract Syntax Notation ("ASN.1") data model into an Extensible Markup Language ("XML") compliant data format, the method including an exploration/adaptation step for exploration of legacy data in a legacy database on a data resource, and a production step for generation of XML data out of the legacy data, wherein the method performs data format mapping between the legacy database and an XML-compliant

- 10 -

representation of that data.

6. The method of claim 5, wherein in the exploration step, standardized database functions are used to retrieve information on a database's data scheme.

5

7. The method of claim 5 wherein the data format mapping is automated between legacy databases and an XML-compliant representation of that data.

8. The method of claim 7, wherein the mapping submethod covers all ASN.1 constructs, both  
10 primitive and composite.

9. The method of claim 3 wherein an XML Document Type Definition ("DTD") conversion between either of the group and an XML-compliant format is made.

15 10. A method that automates the data format mapping between data in a legacy database on a data resource formatted according to one member of a group selected from relational databases modeled according to a relational data model and Extensible Markup Language ("XML")-compliant representations of that data, wherein the method comprises:

- 20 (1) an exploration/adaptation step for exploration of the data resource, and  
(2) a mapping step for generation of XML data out of the legacy data.

11. The method of claim 10 wherein the mapping step includes the following substeps:

- 25 (a) mapping relations, such as tables, within the relational data model onto XML elements including a "table" and a "row" element;  
(b) mapping tuples, such as rows, within a relation onto XML elements which are nested within the XML "table" element; and  
(c) mapping attributes (i.e., columns) of tuples onto XML elements which are nested within the XML "row" element.

30 12. The method of claim 5, 7, 8, or 10, wherein the mapping submethod takes ASN.1 constructs



such as "ANY", "SEQUENCE", "SEQUENCE OF", "SET", "SET OF", "CHOICE", "COMPONENTS OF", "IMPORT", "TAG", and "EXPORT", and performs the following steps:

- (a) mapping primitive ASN.1 types onto XML entities containing character data, wherein, for each primitive ASN.1 type, one entity is defined;
- 5 (b) redefining fields of ASN.1 constructs, which are of a primitive ASN.1 type, as XML elements with an attribute of the corresponding entity;
- (c) mapping the ASN.1 ANY type onto an XML entity containing uninterpreted data;
- (d) mapping ASN.1 constants onto XML entities;
- 10 (e) mapping the ASN.1 SEQUENCE construct onto an XML element containing individual elements of the SEQUENCE as an XML sequence, wherein the XML "?" operator is applied to optional ASN.1 elements;
- (f) mapping the ASN.1 SEQUENCE OF construct onto the XML repetition construct of elements "\*";
- (g) mapping the ASN.1 SET construct onto the XML CHOICE construct, wherein the XML  
15 "?" operator is applied to optional ASN.1 elements in a SET;
- (h) mapping the ASN.1 SET OF construct onto the XML repetition construct of "\*";
- (i) mapping the ASN.1 CHOICE construct onto an XML element containing individual elements of the CHOICE as XML alternatives by using the "|" operator;
- (j) mapping the ASN.1 COMPONENTS OF construct as follows:  
20 for every COMPONENTS OF construct, creating an XML element which contains individual component elements, wherein the COMPONENTS OF optionally has an attribute that refers to the contained construct; and
- (k) mapping each ASN.1 module having certain contents onto a specific XML Document Type Description ("DTD") by recursively applying the above rules to the module's  
25 contents, wherein each DTD forms a separate name space and the ASN.1 constructs IMPORT and EXPORT are then modeled using qualified names for imported/exported XML elements, thus creating an XML specification.

- 12 -

13. The method of claim 12, in order to perform a lossless mapping onto XML, further inserting ASN.1 tags into the XML specification by including one TAG element and three TAG attributes in the XML specification.

5 14. The method of claim 13, wherein the XML TAG elements use an attribute to indicate their policy, their nature, and value of the tag and wherein, an additional attribute indicates whether IMPLICIT or EXPLICIT ASN.1 tagging has been used.

10 15. The method of claim 14 wherein additional attributes are included in the XML specification, wherein XML tag attributes in a separate name-space Abstract Syntax Notation are ASN:policy (EXPLICIT or IMPLICIT), ASN:class (UNIVERSAL, APPLICATION, CONTEXT, PRIVATE), and ASN:tag containing the original ASN.1 tag value.

15 16. A computer-readable medium encoded with a method of externalizing legacy data from a legacy database on a data resource into a format compliant with a certain structured output format in which the format is specified by an associated, automatically generated meta-description, thus enabling access and processing of legacy data by applications that read the structured output format.

20 17. The medium of claim 16, wherein further are added to the method an exploration/adaptation step for exploration of the data resource and a production step for generation of the structured output format data out of the legacy data on the data resource.

25 18. A computer-readable medium encoded with a method of transforming legacy data from a legacy database on a data resource into Extensible Markup Language ("XML") format, the method comprising the steps of:

taking data modelled in a manner selected from a group consisting of relational data and data formatted according to an Abstract Syntax Notation ("ASN.1") data model and transforming such data into an XML-compliant data format, wherein an Extensible Markup Language meta-data description, contained in an XML Document Type Definition ("DTD"), is

30

automatically generated.

19. The medium of claim 18, wherein further are added to the method an exploration/adaptation step for exploration of the data resource and a production step for generation of the Extensible Markup Language data out of the legacy data on the data resource.
20. A computer-readable medium encoded with a method of mapping data formatted according to either of a group consisting of a relational database model and an Abstract Syntax Notation ("ASN.1") data model into an Extensible Markup Language ("XML") compliant data format, the method including an exploration/adaptation step for exploration of legacy data in a legacy database on a data resource, and a production step for generation of XML data out of the legacy data, wherein the method performs data format mapping between the legacy database and an XML-compliant representation of that data.
21. The medium of claim 20, wherein in the exploration step, standardized database functions are used to retrieve information on a database's data scheme.
22. The medium of claim 20 wherein the data format mapping is automated between legacy databases and an XML-compliant representation of that data.
23. The medium of claim 22, wherein the mapping submethod covers all ASN.1 constructs, both primitive and composite.
24. The medium of claim 18 wherein an XML Document Type Definition ("DTD") conversion between either of the group and an XML-compliant format is made.
25. A medium that automates the data format mapping between data in a legacy database on a data resource formatted according to one member of a group selected from relational databases modeled according to a relational data model and Extensible Markup Language

("XML")-compliant representations of that data, wherein the method comprises:

- (a) an exploration/adaptation step for exploration of the data resource, and
- (b) a mapping step for generation of XML data out of the legacy data.

5 26. The medium of claim 25 wherein the mapping step includes the following substeps:

- (a) mapping relations, such as tables, within the relational data model onto XML elements including a "table" and a "row" element;
- (b) mapping tuples, such as rows, within a relation onto XML elements which are nested within the XML "table" element; and
- 10 (c) mapping attributes (i.e., columns) of tuples onto XML elements which are nested within the XML "row" element.

27. The medium of claim 20, 22, 23, or 25, wherein the mapping submethod takes ASN.1 constructs such as "ANY", "SEQUENCE", "SEQUENCE OF", "SET", "SET OF", "CHOICE",

15 "COMPONENTS OF", "IMPORT", "TAG", and "EXPORT", and performs the following steps:

- (a) mapping primitive ASN.1 types onto XML entities containing character data, wherein, for each primitive ASN.1 type, one entity is defined;
- (b) redefining fields of ASN.1 constructs, which are of a primitive ASN.1 type, as XML elements with an attribute of the corresponding entity;
- 20 (c) mapping the ASN.1 ANY type onto an XML entity containing uninterpreted data;
- (d) mapping ASN.1 constants onto XML entities;
- (e) mapping the ASN.1 SEQUENCE construct onto an XML element containing individual elements of the SEQUENCE as an XML sequence, wherein the XML "?" operator is applied to optional ASN.1 elements;
- 25 (f) mapping the ASN.1 SEQUENCE OF construct onto the XML repetition construct of elements "\*";
- (g) mapping the ASN.1 SET construct onto the XML CHOICE construct, wherein the XML "?" operator is applied to optional ASN.1 elements in a SET;
- (h) mapping the ASN.1 SET OF construct onto the XML repetition construct of "\*";
- 30 (i) mapping the ASN.1 CHOICE construct onto an XML element containing individual

elements of the CHOICE as XML alternatives by using the “|” operator;

(j) mapping the ASN.1 COMPONENTS OF construct as follows:

for every COMPONENTS OF construct, creating an XML element which contains individual component elements, wherein the COMPONENTS OF optionally has an attribute that refers to the contained construct; and

(k) mapping each ASN.1 module having certain contents onto a specific XML Document Type Description (“DTD”) by recursively applying the above rules to the module’s contents, wherein each DTD forms a separate name space and the ASN.1 constructs IMPORT and EXPORT are then modeled using qualified names for imported/exported XML elements, thus creating an XML specification.

28. The medium of claim 27, in order to perform a lossless mapping onto XML, further inserting ASN.1 tags into the XML specification by including one TAG element and three TAG attributes in the XML specification.

29. The medium of claim 28, wherein the XML TAG elements use an attribute to indicate their policy, their nature, and value of the tag and wherein, an additional attribute indicates whether IMPLICIT or EXPLICIT ASN.1 tagging has been used.

30. The medium of claim 29 wherein additional attributes are included in the XML specification, wherein XML tag attributes in a separate name-space Abstract Syntax Notation are ASN:policy (EXPLICIT or IMPLICIT), ASN:class (UNIVERSAL, APPLICATION, CONTEXT, PRIVATE), and ASN:tag containing the original ASN.1 tag value.

**THIS PAGE BLANK (USPTO)**

**METHOD OF EXTERNALIZING RELATIONAL  
AND ASN.1-FORMATTED DATA INTO XML FORMAT**

**Abstract of the Disclosure**

5

A computer-readable medium is encoded with a method of externalizing legacy data from a legacy database on a data resource into an Extensible Markup Language ("XML") -compliant format where the format is specified by an automatically generated XML meta-description, thus enabling access and processing of legacy data by XML-compliant applications.

10

**THIS PAGE BLANK (USPTO)**



1/2

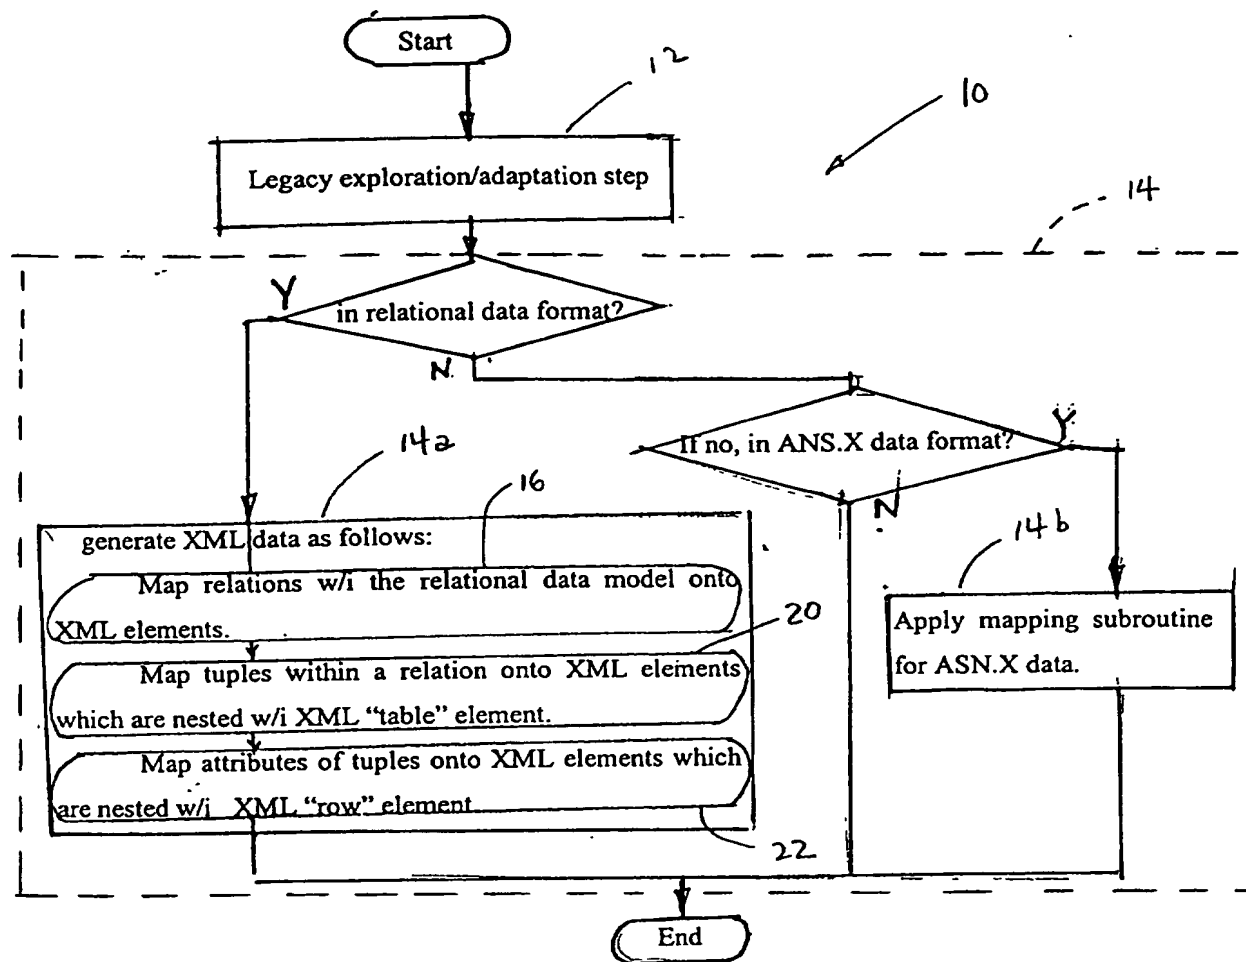


FIG. 1

14b

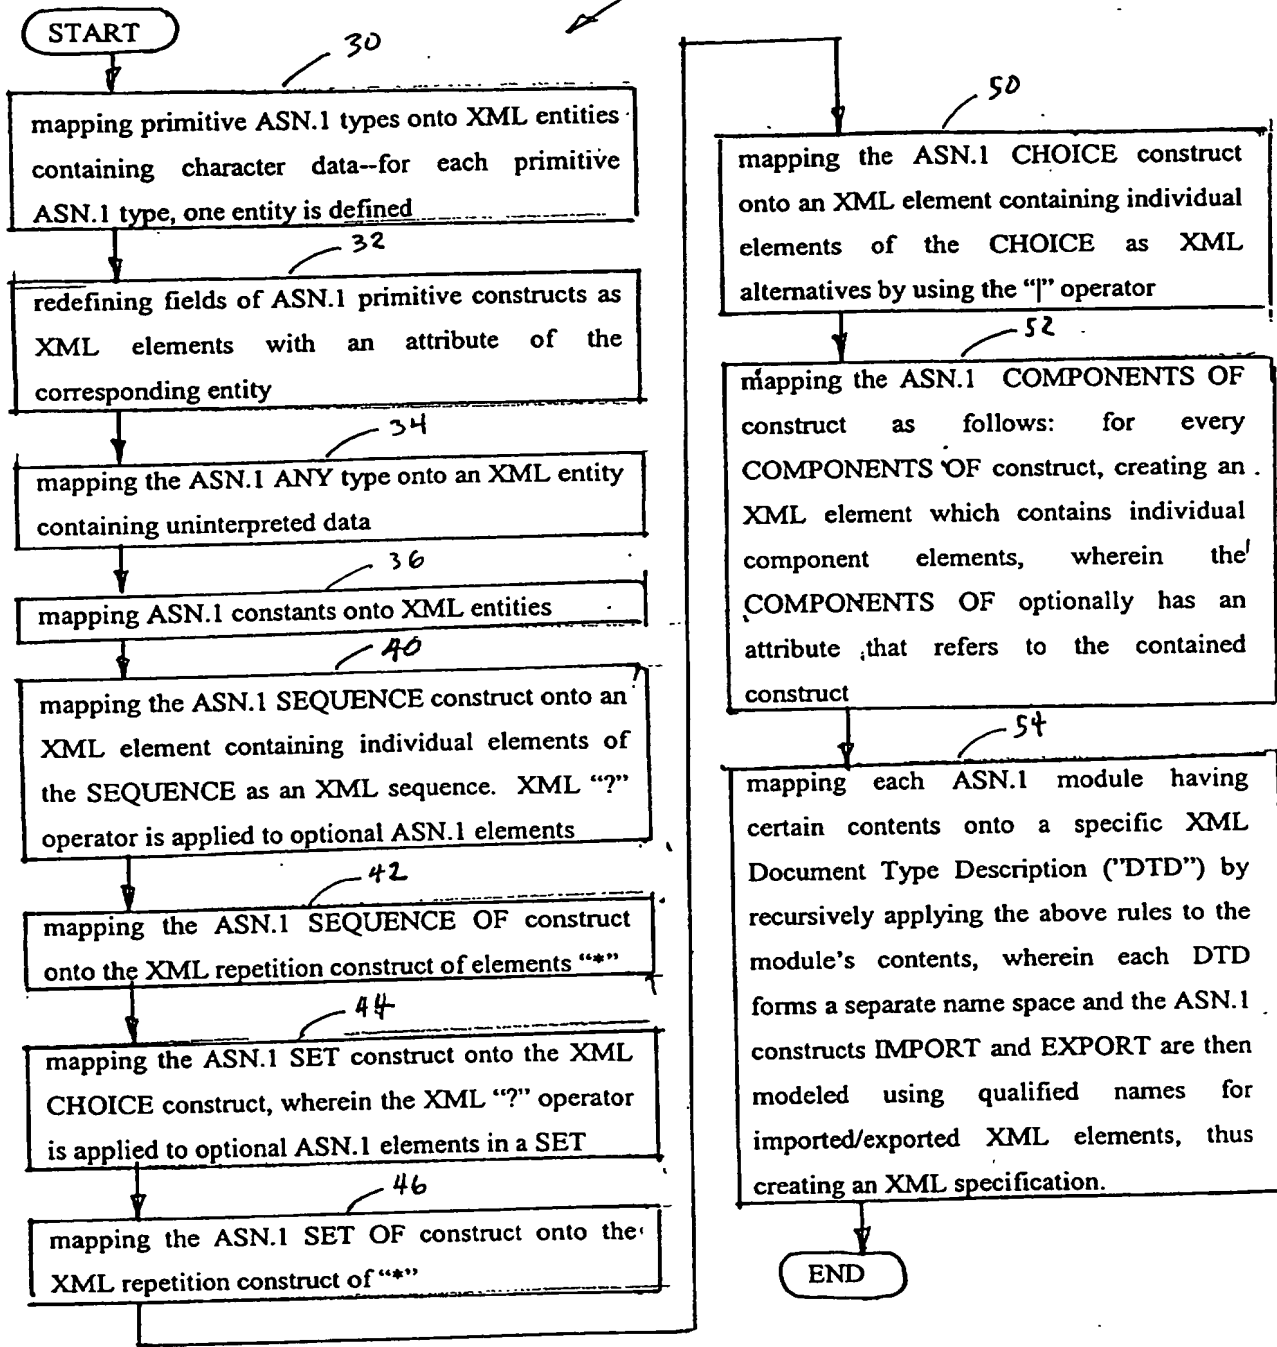


FIG. 2